

## 32E Series - Endless Design Single Duty - Deli



| Model No.         | Description    | Length | Depth | Height | Voltage | Amps | HP/BTUs | Power Cord | Est. Ship Weight |
|-------------------|----------------|--------|-------|--------|---------|------|---------|------------|------------------|
| SC-CDS32E-4-LED   | Self Contained | 50"    | 30.5" | 49.6"  | 115     | 12.0 | 1/4     | YES        | 470              |
| SC-CDS32E-6-LED   | Self Contained | 74"    | 30.5" | 49.6"  | 115     | 12.0 | 1/3     | YES        | 680              |
| SC-CDS32E-8-LED   | Self Contained | 98"    | 30.5" | 49.6"  | 115     | 16.0 | 1/2     | YES        | 910              |
| R-CDS32E-4-LED    | Remote         | 50"    | 30.5" | 49.6"  | 115     | 0.8  | 1400    | NO         | 430              |
| R-CDS32E-6-LED    | Remote         | 74"    | 30.5" | 49.6"  | 115     | 1.6  | 2100    | NO         | 630              |
| R-CDS32E-8-LED    | Remote         | 98"    | 30.5" | 49.6"  | 115     | 1.6  | 2800    | NO         | 860              |
| SC-CDS32E-4PT-LED | Self Contained | 50"    | 30.5" | 49.6"  | 115     | 12.0 | 1/3     | YES        | 470              |
| SC-CDS32E-6PT-LED | Self Contained | 74"    | 30.5" | 49.6"  | 115     | 12.0 | 1/3     | YES        | 680              |
| SC-CDS32E-8PT-LED | Self Contained | 98"    | 30.5" | 49.6"  | 115     | 16.0 | 1/2     | YES        | 910              |

MODEL NUMBER PREFIX - SC = Self Contained R = Remote  
 MODEL NUMBER SUFFIX - W = White B = Black S = Stainless Steel LED = LED lighting  
 • Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity  
 • Cases are equipped with drains; check your local building codes for connection requirements.  
 • Specification subject to change without notice  
 IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY

**R** **KCL**  
 REVIT<sup>®</sup> ENGINEERING

**UL** **US**  
 LISTED

**CLASSIFIED**  
 EPH  
 ANSI/NSF 7

**SANITATION**  
**CLASSIFIED**  
 NSF/ANSI 7  
 647N

## 32E Series - Endless Design Single Duty - Deli

### Standard Specifications and Optional Features

#### CONSTRUCTION

- UL Classified to ANSI/NSF 7
- Foamed in place CFC free foam
- Thermal insulated front glass - 28" H
- Heavy gauge steel super structure
- Single duty display
- Endless design allows for continuous line up
- Drain is included for cleaning

#### INTERIOR

- White, black, and stainless steel ends
- Stainless steel heavy gauge mezzanine shelf (2 rows)
- White aluminum floor-main deck shelves
- Air insulated baffle  
(prevents moisture from dripping into display area)

#### EXTERIOR

- Double pane rear removable doors
- Removable front grille allows for cleaning
- Removable rear grille for easy servicing
- 1" removeable end panels
- 1" Front bumper

#### FINISHES

- White, black, and stainless steel front and ends
- Stainless steel mirror trim
- Stainless steel heavy gauge top - 20" W
- Rear of unit is stainless steel brush finish at top
- Bottom rear is designer white or glossy black

#### LIGHTING

- 2 rows of LED lighting at top of unit

#### ELECTRICAL REQUIREMENTS

- 115V with powercord
- UL/CUL listed
- 115V-5AMP general purpose receptacle

#### REFRIGERATION

- Copevap system (eliminates need for condensate pan)
- R513A expansion valve system
- Gravity coil located at inside top of unit
- Self contained unit
- Automatic defrost electronically controlled (self contained units only)
- Electronically maintains constant temperatures
- Remotes available

#### OPTIONS

- Stainless steel, laminate, or paint
- Mirrored doors
- Extra stainless steel mezzanine shelf
- 2" Front bumper
- Door locks
- Pass thru front doors
- Sandwich racks
- Salad pan settings

#### **Important Note:**

**All refrigerated cases are designed to operate in an environment of 75 degrees and 55% relative humidity.**

**Product must be cooled before being displayed within the case.**

**DRAIN IS REQUIRED**

## 32E Series - Endless Design Single Duty - Deli

### Technical Data

| Model No.                                   | SC<br>R     | SC-CDS32E-4-LED<br>R-CDS32E-4-LED | SC-CDS32E-6-LED<br>R-CDS32E-6-LED | SC-CDS32E-8-LED<br>R-CDS32E-8-LED | SC-CDS32E-4PT-LED<br>R-CDS32E-4PT-LED | SC-CDS32E-6PT-LED<br>R-CDS32E-6PT-LED | SC-CDS32E-8PT-LED<br>R-CDS32E-8PT-LED |
|---------------------------------------------|-------------|-----------------------------------|-----------------------------------|-----------------------------------|---------------------------------------|---------------------------------------|---------------------------------------|
| Length with (2) ends                        |             | 50"                               | 74"                               | 98"                               | 50"                                   | 74"                                   | 98"                                   |
| Length without ends                         |             | 48"                               | 72"                               | 96"                               | 48"                                   | 72"                                   | 96"                                   |
| Height with ends                            |             | 49.625"                           | 49.625"                           | 49.625"                           | 49.625"                               | 49.625"                               | 49.625"                               |
| Height without ends                         |             | 49"                               | 49"                               | 49"                               | 49"                                   | 49"                                   | 49"                                   |
| Depth with ends                             |             | 30.5"                             | 30.5"                             | 30.5"                             | 30.5"                                 | 30.5"                                 | 30.5"                                 |
| Depth without ends                          |             | 30"                               | 30"                               | 30"                               | 30"                                   | 30"                                   | 30"                                   |
| Endless design<br>(Dimensions are +/- 1/4") |             | YES                               | YES                               | YES                               | YES                                   | YES                                   | YES                                   |
| Operating temperature                       |             | 36°F to 40°F                      | 36°F to 40°F                      | 36°F to 40°F                      | 36°F to 40°F                          | 36°F to 40°F                          | 36°F to 40°F                          |
| Refrigerant (exp. valve)                    | SC          | R513A                             | R513A                             | R513A                             | R513A                                 | R513A                                 | R513A                                 |
| Refrigerant (exp. valve)                    | R           | R407A                             | R407A                             | R407A                             | R407A                                 | R407A                                 | R407A                                 |
| Compressor size HP                          | SC          | 1/4                               | 1/3                               | 1/2                               | 1/3                                   | 1/3                                   | 1/2                                   |
| Defrost per day (24 hours)                  | Air Defrost | 1 per day                         | 1 per day                         | 1 per day                         | 1 per day                             | 1 per day                             | 1 per day                             |
| BTU's at +20°F Evap. Temp.                  | R           | 1400                              | 2100                              | 2800                              | 1400                                  | 2100                                  | 2800                                  |
| Voltage                                     | SC          | 115                               | 115                               | 115                               | 115                                   | 115                                   | 115                                   |
| Amperage                                    | SC          | 12.0                              | 12.0                              | 16.0                              | 12.0                                  | 12.0                                  | 16.0                                  |
| Remote Voltage                              | R           | 115                               | 115                               | 115                               | 115                                   | 115                                   | 115                                   |
| Amperage, lights only                       | R           | 0.8                               | 1.6                               | 1.6                               | 0.8                                   | 1.6                                   | 1.6                                   |
| Cord and plug                               | SC          | YES                               | YES                               | YES                               | YES                                   | YES                                   | YES                                   |
|                                             | R           | NO                                | NO                                | NO                                | NO                                    | NO                                    | NO                                    |
| Exterior color                              |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                               | W, B, S                               | W, B, S                               |
| Interior color                              |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                               | W, B, S                               | W, B, S                               |
| Floors                                      |             | W, B, S                           | W, B, S                           | W, B, S                           | W, B, S                               | W, B, S                               | W, B, S                               |
| # of top doors                              |             | 2                                 | 2                                 | 4                                 | 2                                     | 2                                     | 4                                     |
| Door size                                   |             | 20.8" x 23.5"                     | 31.3" x 23.5"                     | 20.8" x 23.5"                     | 20.8" x 23.5"                         | 31.3" x 23.5"                         | 20.8" x 23.5"                         |
| # of coils                                  |             | 1                                 | 1                                 | 1                                 | 1                                     | 1                                     | 1                                     |
| Bottom storage                              |             | NO                                | NO                                | NO                                | NO                                    | NO                                    | NO                                    |
| Front glass size                            |             | 28" x 46.6875"                    | 28" x 70.6875"                    | 28" x 94.6875"                    |                                       |                                       |                                       |
| # of main deck shelves                      |             | 2                                 | 3                                 | 4                                 | 2                                     | 3                                     | 4                                     |
| Main deck size                              |             | 23.625" x 25"                     | 23.625" x 25"                     | 23.625" x 25"                     | 23.625" x 25"                         | 23.625" x 25"                         | 23.625" x 25"                         |
| Cubic capacity                              |             | 23                                | 34.5                              | 46                                | 23                                    | 34.5                                  | 46                                    |
| Mezzanine shelf, 2 rows                     |             | Standard                          | Standard                          | Standard                          | Standard                              | Standard                              | Standard                              |
| Shipping Info                               |             |                                   |                                   |                                   |                                       |                                       |                                       |
| Height                                      |             | 55"                               | 55"                               | 55"                               | 55"                                   | 55"                                   | 55"                                   |
| Depth                                       |             | 44"                               | 44"                               | 44"                               | 44"                                   | 44"                                   | 44"                                   |
| Length                                      |             | 61"                               | 87"                               | 115"                              | 61"                                   | 87"                                   | 115"                                  |
| Gross weight SC/R                           |             | 470/430                           | 680/630                           | 910/910                           | 470/430                               | 680/630                               | 910/860                               |
| Cubic feet                                  |             | 85                                | 122                               | 161                               | 85                                    | 122                                   | 161                                   |

(ALL WHITE OR ALL BLACK, NO EXTRA CHARGE—IF COLORS ARE MIXED AN ADDITIONAL CHARGE WILL APPLY)

#### Prefix

SC = Self Contained  
R = Remote


#### Suffix

B = Black  
W = White  
S = Stainless Steel  
LED = LED lighting


- Cases are designed to operate at 75 degrees Fahrenheit and 55% relative humidity
- Cases are equipped with drains; check your local building codes for connection requirements.
- Specification subject to change without notice

## 32E Series - Endless Design Single Duty - Deli




### Technical Data • Side View • Plan View

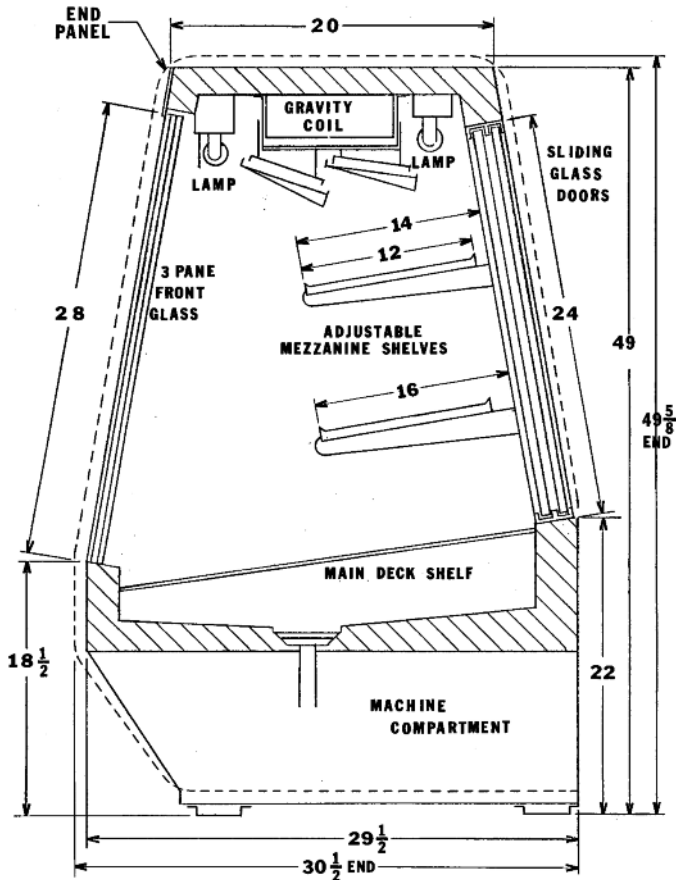

### Cross Section



### Side View

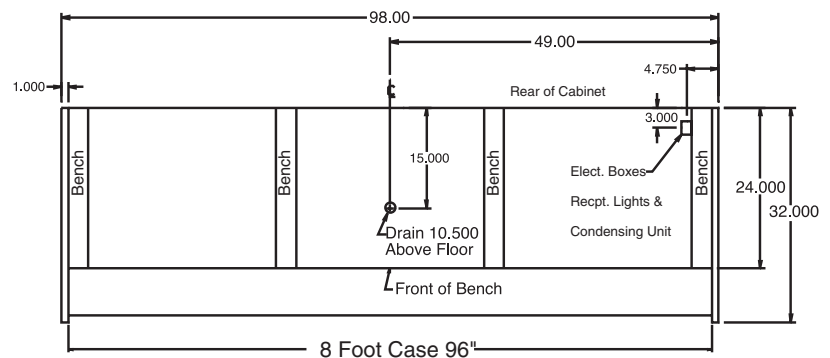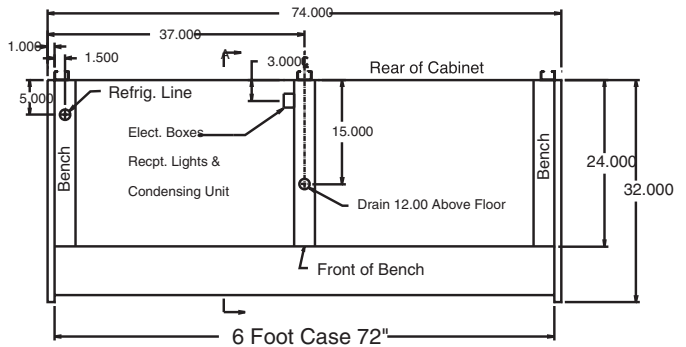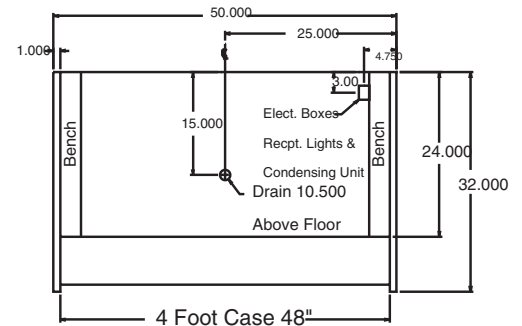

### Plan Views